



**ihse.**  
KVM & Beyond

# Draco vario Repeater

485 Series

## (Cross) Repeater

## User Manual

Edition: 2017-03-31



## **Copyright**

© 2017. All rights reserved. This information may not be reproduced in any manner without the prior written consent of the manufacturer.

Information in this document is subject to change without notice.

## **Trademarks**

All trademark and trade names mentioned in this document are acknowledged to be the property of their respective owners.

## **Disclaimer**

While every precaution has been taken during preparation of this manual, the manufacturer assumes no liability for errors or omissions. The manufacturer assumes no liability for damages resulting from the use of the information contained herein.

The manufacturer reserves the right to change specifications, functions, or circuitry of the product without notice.

The manufacturer cannot accept liability for damage due to misuse of the product or due to any other circumstances outside the manufacturer's control (whether environmental or installation related). The manufacturer shall not be liable for any loss, damage, or injury arising directly, indirectly, incidentally, or consequently from the use of this product.

# Contents

<b>1</b>	<b>About This Manual .....</b>	<b>5</b>
1.1	Scope.....	5
1.2	Validity .....	5
1.3	Cautions and Notes .....	5
<b>2</b>	<b>Safety Instructions .....</b>	<b>6</b>
<b>3</b>	<b>Description .....</b>	<b>7</b>
3.1	Application .....	7
3.2	System Overview .....	8
3.3	Product Range .....	9
3.3.1	Chassis .....	9
3.3.2	KVM-Extender Modules .....	10
3.4	Accessories Upgrade Kits .....	10
3.5	Accessories.....	11
3.6	Device Views .....	11
3.6.1	2-fold Vario Chassis 474-BODY2/2R .....	11
3.6.2	2-fold Vario Chassis 474-BODY2N .....	12
3.6.3	4-fold Vario Chassis 474-BODY4/4R .....	13
3.6.4	6-fold Vario Chassis 474-BODY6R .....	14
3.6.5	6-fold Vario Chassis 474-BODY6BP .....	15
3.6.6	6-fold Vario Chassis 474-BODY6BPF .....	16
3.6.7	21-fold Vario Chassis 474-BODY21R .....	17
3.6.8	Model 485-BC .....	18
3.6.9	Model 485-BS .....	18
3.6.10	Model 485-BX .....	18
3.6.11	Model 485-BCC .....	19
3.6.12	Model 485-BSS.....	19
3.6.13	Model 485-BXX.....	20
3.7	Status LEDs .....	21
3.7.1	Status KVM-Extender Module.....	21

<b>4</b>	<b>Installation</b> .....	<b>22</b>
4.1	Package Contents .....	22
4.2	System anschließen .....	22
4.2.1	(Cross) Repeater Setup .....	22
4.3	Example Applications .....	23
<b>5</b>	<b>Configuration</b> .....	<b>25</b>
<b>6</b>	<b>Operation</b> .....	<b>25</b>
<b>7</b>	<b>Specifications</b> .....	<b>26</b>
7.1	Interfaces .....	26
7.1.1	RJ45 (Interconnect) .....	26
7.1.2	Fiber SFP Type LC (Interconnect) .....	26
7.2	Interconnect Cable .....	27
7.2.1	Cat X .....	27
7.2.2	Fiber .....	28
7.3	Connector Pinouts .....	29
7.4	Power Supply .....	30
7.5	Environmental Conditions .....	30
7.6	Size .....	31
7.7	Shipping Weight .....	32
<b>8</b>	<b>Troubleshooting</b> .....	<b>33</b>
8.1	General Failures .....	33
<b>9</b>	<b>Technical Support</b> .....	<b>34</b>
9.1	Support Checklist .....	34
9.2	Shipping Checklist .....	34
<b>10</b>	<b>Certificates</b> .....	<b>35</b>
10.1	CE Declaration Of Conformity .....	35
10.2	North American Regulatory Compliance .....	36
10.3	Product Safety .....	37
10.4	WEEE .....	37
10.5	RoHS/RoHS 2 .....	37
<b>11</b>	<b>Glossary</b> .....	<b>38</b>

## 1 About This Manual

### 1.1 Scope

This manual describes how to install your (Cross) Repeater, how to operate it and how to perform trouble shooting.

### 1.2 Validity

This manual is valid for all devices listed on the front page. The product code is printed on the base of the devices.

### 1.3 Cautions and Notes

The following symbols are used in this manual:



This symbol indicates an important operating instruction that should be followed to avoid any potential damage to hardware or property, loss of data, or personal injury.



This symbol indicates important information to help you make the best use of this product.



This symbol indicates best practice information to show recommended and optimal ways to use this product in an efficient way.

# 2 Safety Instructions

To ensure reliable and safe long-term operation of your (Cross) Repeater please note the following guidelines:

### Installation

- Only use in dry, indoor environments.
- Only use the device according to this User Manual. Failure to follow these procedures could result in damage to the equipment or injury to the user or installer.
- The (Cross) Repeater and the power supply units can get warm. Do not install components in an enclosed space without any airflow.
- Do not place the power supply directly on top of the device.
- Do not obscure ventilation holes.
- Only use power supplies originally supplied with the product or manufacturer-approved replacements. Do not use a power supply if it appears to be defective or has a damaged chassis.
- Connect all power supplies to grounded outlets. In each case, ensure that the ground connection is maintained from the outlet socket through to the power supply's AC power input.
- Do not connect the link interface to any other equipment, particularly network or telecommunications equipment.
- Take any required ESD precautions.



In order to disconnect the device completely from the electric circuit, all power cables have to be removed.

### Repair

- Do not attempt to open or repair a power supply unit.
- Do not attempt to open or repair the (Cross) Repeater. There are no user serviceable parts inside.
- Please contact your dealer or manufacturer if there is a fault.

## 3 Description

### 3.1 Application

The (Cross) Repeater is basically used in order to double the maximum cabling distance between a KVM extender CON or CPU Unit or even a KVM matrix. In addition to that the device can also be used for media conversion from Cat X to fiber or vice versa.


The device is available as a pure Cat X or fiber version (repeater) and as a hybrid version of Cat X and fiber (cross repeater) for an additional electrical/optical signal conversion.

## 3.2 System Overview

The (Cross) Repeater consists of at least one module depending on the application.

The device is connected between a KVM extender CON and CPU Unit via the interconnect cable or can be alternatively connected between a KVM extender unit and a KVM matrix.

The (Cross) Repeater communicates with both the KVM extenders and a KVM-Matrix via the interconnect cables.

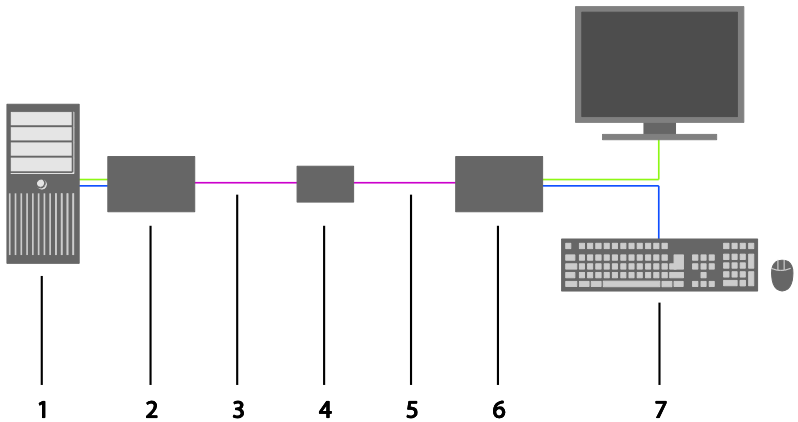

### System Overview

- 1 Source (computer, CPU)
- 2 KVM Extender CPU Unit
- 3 Interconnect cable (Cat X or fiber)
- 4 (Cross) Repeater
- 5 Interconnect cable (Cat X or fiber)
- 6 KVM Extender CON Unit
- 7 Console (monitor, keyboard, mouse)



See Chapter 4.3, Page 23 for installation examples.



## 3.3 Product Range

### 3.3.1 Chassis

Model	Description
474-BODY2	Empty chassis for up to 2 boards, 1x external power supply unit
474-BODY2R	Empty chassis for up to 2 boards, 1x external power supply unit, preparation for redundancy for a second power supply unit (external)
474-BODY2N	Empty chassis for up to 2 boards, 1x internal power supply unit, preparation for redundancy for a second power supply unit (external)
474-BODY4	Empty chassis for up to 4 boards, 1x external power supply unit
474-BODY4R	Empty chassis for up to 4 boards, 1x external power supply unit, preparation for redundancy for a second power supply unit (external)
474-BODY6R	Empty chassis for up to 6 boards, 1x internal power supply unit, preparation for redundancy for a second power supply unit (external)
474-BODY6BP	Empty chassis for up to 6 boards, active backplane, 2x internal power supply unit (redundancy)
474-BODY6BPF	Empty chassis for up to 6 boards, active backplane, 2x internal power supply unit (redundancy) with connectors on rear side
474-BODY21/4U	Empty chassis for up to 21 boards, 1x internal power supply unit, preparation for redundancy for a second power supply unit (internal)

## 3.3.2 (Cross) Repeater Modules

Model	Description
485-BC	Repeater module Cat X for range extension up to 280 m
485-BS	Repeater module fiber (Single-Mode) for range extension up to 20,000 m
485-BX	Repeater module Cat X/fiber (Single-Mode) for an electrical/optical media conversion, maximum extension 10,140 m
485-BCC	Dual repeater module Cat X for range extension up to 280 m
485-BSS	Dual repeater module fiber (Single-Mode) for range extension up to 20,000 m
485-BXX	Repeater module Cat X/fiber (Single-Mode) for an electrical/optical media conversion, maximum extension 10,140 m

## 3.4 Accessories Upgrade Kits

Model	Description
474-2RMK	19"/1U rack mount kit for 2-fold chassis
474-2NRMK	19"/1U rack mount kit for 2-fold chassis with internal PSU
474-4RMK	19"/1U rack mount kit for 4-fold chassis
474-6RMK	19"/1U rack mount kit for 6-fold chassis
474-VPLATE	Fastening strips for screw or snap on for 2-, 4- and 6-fold chassis
474-OPTRED	Retrofitting for redundant power supply option (without power supply) for 2- and 4-fold chassis
474-PSU2	Power supply for 2-fold chassis (spare or redundancy)
474-PSU4	Power supply for 4-fold chassis (spare or redundancy)
474-PSU6	Power supply for 6-fold chassis (spare or redundancy)
474-PSU21	Power supply for 6-fold-chassis (spare or redundancy)
474-BLND1	Blind plate 3U/4HP for 2-, 4- and 6-fold chassis
474-BLND2	Blind plate 3U/8HP for 2-, 4- and 6-fold chassis
474-6FAN	Fan option for chassis 474-BODY6BP/F



(Cross) Repeaters and the power supply units can get warm and must not be installed in closed rooms with no air circulation. For rack-mount installations, at least 0.5 U (height unit) is required above the (Cross) Repeater for ventilation.


## 3.5 Accessories

Model	Description
260-5G	International power supply unit 100...240 VAC / 5 VDC / 3 A
260-5U	International power supply unit 100...240 VAC / 5 VDC / 4 A
474-PSULOCK	IEC connection cable for power supply, lockable

## 3.6 Device Views

### 3.6.1 2-fold Vario Chassis 474-BODY2/2R

#### CPU and CON Unit




#### Rear View

- 1 Slot for modules #1
- 2 Connect to 5VDC power supply (standard)
- 3 Slot for modules #2
- 4 Connect to 5VDC power supply (redundancy, optional)

### 3.6.2 2-fold Vario Chassis 474-BODY2N

#### CPU and CON Unit

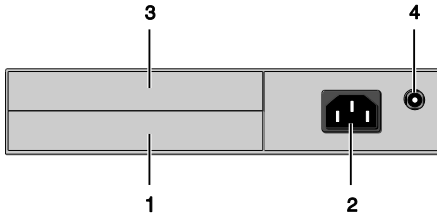

#### Rear View


- 1 Slot for modules #1
- 2 Connect to power supply (standard)
- 3 Slot for modules #2
- 4 Connect to 5VDC power supply (redundancy)



The 2-fold vario chassis with an internal power supply is not equipped with a fuse on its primary side. Therefore the protection against excessive currents has to be provided by the electrical installation of the building.

### 3.6.3 4-fold Vario Chassis 474-BODY4/4R

#### CPU and CON Unit

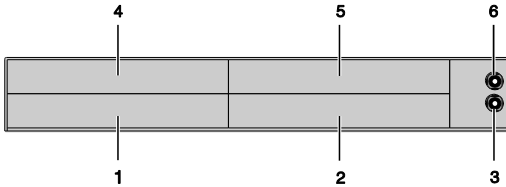

#### Rear View


- 1 Slot for modules #3
- 2 Slot for modules #1
- 3 Connect to 5VDC power supply (standard)
- 4 Slot for modules #4
- 5 Slot for modules #2
- 6 Connect to 5VDC power supply (redundancy, optional)



For operation with three KVM Extender CON modules and a USB 2.0 CON module in a 4-fold vario chassis, two power supplies are necessary. In this case, redundancy is inapplicable.

## 3.6.4 6-fold Vario Chassis 474-BODY6R

### CPU and CON Unit

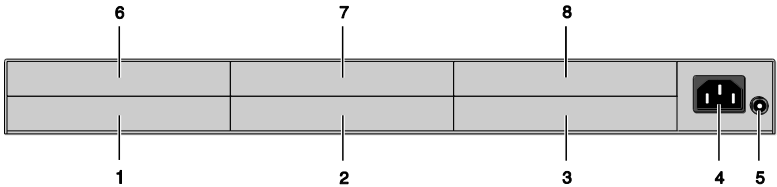

#### Rear View

- 1 Slot for modules #5
- 2 Slot for modules #3
- 3 Slot for modules #1
- 4 Connect to power supply (standard)
- 5 Connect to 5VDC power supply (standard)
- 6 Slot for modules #6
- 7 Slot for modules #4
- 8 Slot for modules #2




For operation with KVM Extender modules in a 6-fold vario chassis, two power supplies are necessary. In this case, redundancy is inapplicable.



The 6-fold vario chassis is not equipped with a fuse on its primary side. Therefore the protection against excessive currents has to be provided by the electrical installation of the building.


### 3.6.5 6-fold Vario Chassis 474-BODY6BP

#### CPU and CON Unit

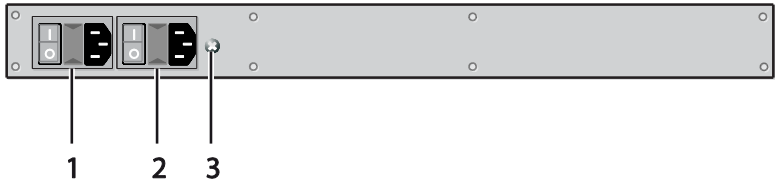

#### Front View

- 1 Connect to power supply 1
- 2 Connect to power supply 2 (redundancy)
- 3 Grounding

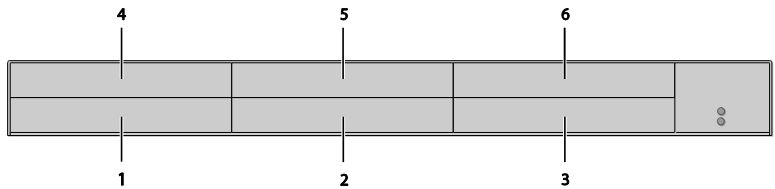


#### Rear View

- 1 Slot for modules #5
- 2 Slot for modules #3
- 3 Slot for modules #1
- 4 Slot for modules #6
- 5 Slot for modules #4
- 6 Slot for modules #2

## 3.6.6 6-fold Vario Chassis 474-BODY6BPF

### CPU and CON Unit

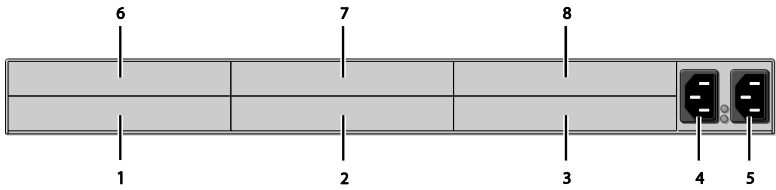


### Rear View

- 1 Slot for modules #5
- 2 Slot for modules #3
- 3 Slot for modules #1
- 4 Connect to power supply 1
- 5 Connect to power supply 2 (redundancy)
- 6 Slot for modules #6
- 7 Slot for modules #4
- 8 Slot for modules #2




### 3.6.7 21-fold Vario Chassis 474-BODY21R

#### CPU and CON Unit

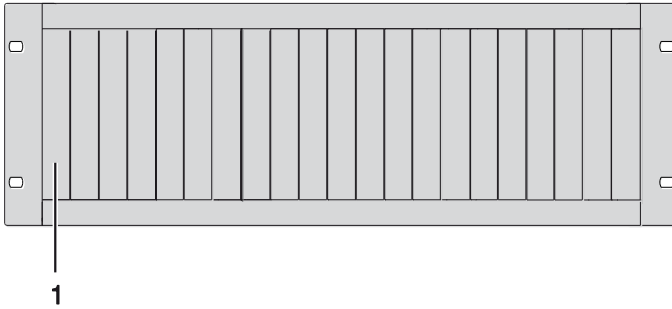

*Rear View*

- 1 Slots for modules #1 - #21

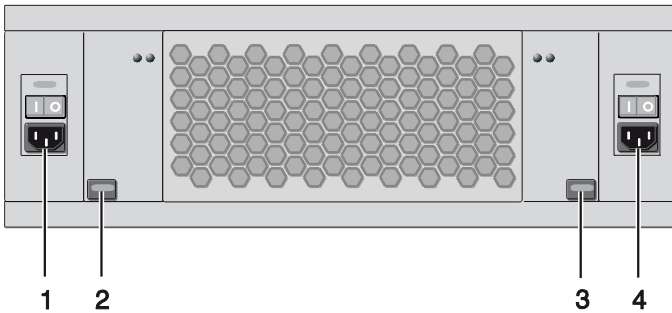


*Front View*

- 1 Connect to power supply 2  
 2 Locking for power supply 2 (redundancy)  
 3 Locking for power supply 1 (standard)  
 4 Connect to power supply 1

## 3.6.8 Model 485-BC

### Module




### Rear View

- 1 Service port
- 2 Connect to interconnect cable 1
- 3 Connect to interconnect cable 2

## 3.6.9 Model 485-BS

### Module




### Rear View

- 1 Service port
- 2 Connect to interconnect cable 1
- 3 Connect to interconnect cable 2

## 3.6.10 Model 485-BX

### Module




### Rear View

- 1 Service port
- 2 Connect to interconnect cable 1
- 3 Connect to interconnect cable 2

### 3.6.11 Model 485-BCC

#### Module




#### Rear View

- 1 Service port (repeater #1)
- 2 Connect to interconnect cable 1 (repeater #1)
- 3 Connect to interconnect cable 2 (repeater #1)
- 4 Service port (repeater #2)
- 5 Connect to interconnect cable 1 (repeater #2)
- 6 Connect to interconnect cable 2 (repeater #2)

### 3.6.12 Model 485-BSS

#### Module




#### Rear View

- 1 Service port (repeater #1)
- 2 Connect to interconnect cable 1 (repeater #1)
- 3 Connect to interconnect cable 2 (repeater #1)
- 4 Service port (repeater #2)
- 5 Connect to interconnect cable 1 (repeater #2)
- 6 Connect to interconnect cable 2 (repeater #2)

## 3.6.13 Model 485-BXX

### Module



### Rear View


- 1 Service port (repeater #1)
- 2 Connect to interconnect cable 1 (repeater #1)
- 3 Connect to interconnect cable 2 (repeater #1)
- 4 Service port (repeater #2)
- 5 Connect to interconnect cable 1 (repeater #2)
- 6 Connect to interconnect cable 2 (repeater #2)

## 3.7 Status LEDs

### 3.7.1 Status (Cross) Repeater Module

The (Cross) Repeater module is fitted with a multi color LED for overall status indication and with two further LEDs for indication of the connection status.

#### Module

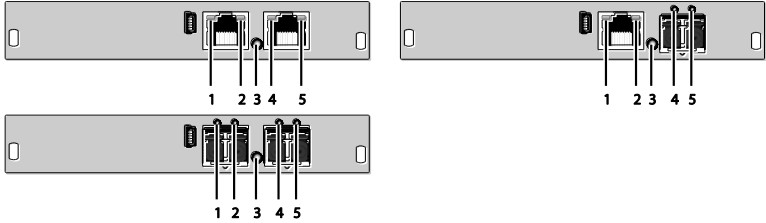





Rear View

Rear View

#### LED 1/2 and 4/5: Connection Status

Pos.	LED	Status	Description
1/4	<b>Failure LED</b> (green)	Off	Connection available
		On or Flashing	Connection failure (flashing for about 20 s following a connection failure)
2/5	<b>Status LED</b> (green)	Flashing	No connection via interconnect cable
		On	Connection available

#### LED 3: Device Status

LED color		Description
Red		Device ready
Blue		Link 1 (left connector) available, Link 2 (right connector) not detected
Green		Link 2 (right connector) available, Link 1 (left connector) not detected
Light Blue		Link 1 (left connector) and Link 2 (right connector) available

## 4 Installation

### 4.1 Package Contents

Your extender package contains the following items:

**(Cross) Repeater:**

- (Cross) Repeater in the vario chassis
- 1x (redundancy 2x) 5 VDC international power supply unit per KVM Extender unit (depending on chassis)
- 1x (redundancy 2x) country-specific power cord (depending on chassis)
- Quick Setup



If anything is missing, contact your dealer.

### 4.2 System anschließen



First time users are recommended to setup the system in the same room as a test setup. This will allow you to identify and solve any cabling problems, and experiment with your system more conveniently.



→ Please verify that interconnect cables, interfaces, and handling of the devices comply with the requirements (see Chapter 7, Page 26).

#### 4.2.1 (Cross) Repeater Setup


1. Switch off all devices.
2. Connect the (Cross) Repeater with the interconnect cable(s).
3. Connect the chassis of the (Cross) Repeater to the power supply.
4. Power up the system.



To power up the system, the following sequence is recommended:  
Monitor – CON Unit – (Cross) Repeater – CPU Unit – source.

## 4.3 Example Applications

This section illustrates typical installations of (Cross) Repeaters:

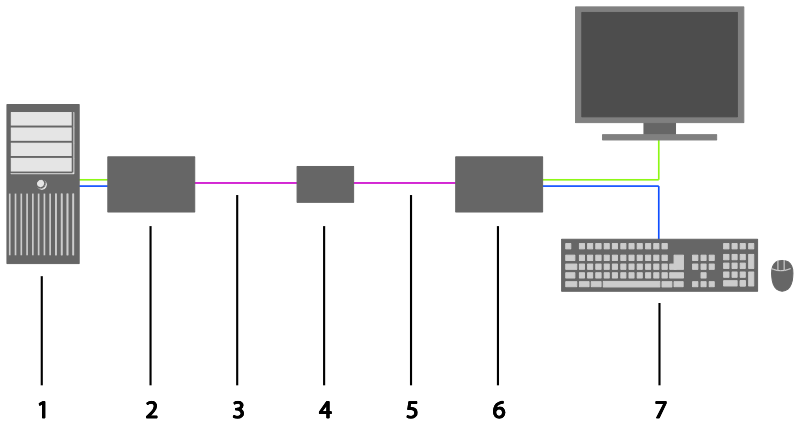


### *Single Media Conversion*

- 1 Source (computer, CPU)
- 2 KVM Extender CPU Unit
- 3 Interconnect cable (Cat X)
- 4 (Cross) Repeater
- 5 Interconnect cable (fiber)
- 6 KVM Extender CON Unit
- 7 Console (monitor, keyboard, mouse)



The example shown in this application scenario will be primarily recommended, if connections through KVM matrix must be bypassed in case of major matrix problems. Therefore KVM extenders with Cat X and with fiber connector can be directly connected to each other.

## Draco vario (Cross) Repeater

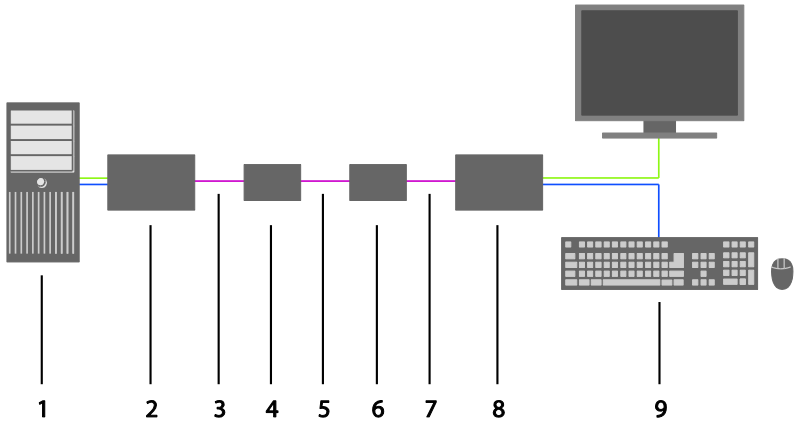

### *Dual Media Conversion*

- 1 Source (computer, CPU)
- 2 KVM Extender CPU Unit
- 3 Interconnect cable (Cat X)
- 4 (Cross) Repeater #1
- 5 Interconnect cable (fiber)
- 6 (Cross) Repeater #2
- 7 Interconnect cable (Cat X)
- 8 KVM Extender CON Unit
- 9 Console (monitor, keyboard, mouse)



## 5 Configuration

The (Cross) Repeater does not require any configuration and is ready for use per default.

## 6 Operation

The (Cross) Repeater does not have any adjustable operating modes and is ready for use per default.

# 7 Specifications

## 7.1 Interfaces

### 7.1.1 RJ45 (Interconnect)

Communication between Cat X devices requires a 1000BASE-T connection.

Connector wiring must comply with EIA/TIA-568-B (1000BASE-T), with RJ45 connectors at both ends. All four cable wire pairs are used.

### 7.1.2 Fiber SFP Type LC (Interconnect)

Communication of fiber devices is performed via Gigabit SFPs that are connected to suitable fibers fitted with connectors type LC (see Chapter 7.2.2, Page 28).



The correct function of the device can only be guaranteed with SFPs provided by the manufacturer.



SFP modules can be damaged by electrostatic discharge (ESD).

→ Please consider ESD handling specifications.

## 7.2 Interconnect Cable

### 7.2.1 Cat X



A point-to-point connection is required. Operation with several patch fields is possible. Routing over an active network component, such as an Ethernet Hub, Router or Matrix, is not allowed.

➔ Avoid routing Cat X cables along power cables.



To maintain regulatory EMC compliance, correctly installed shielded Cat X cable must be used throughout the interconnection link.



To maintain regulatory EMC compliance, all Cat X cables need to carry ferrites on both cable ends close to the device.

#### Type of Interconnect Cable

The (Cross) Repeater requires interconnect cabling specified for Gigabit Ethernet (1000BASE-T). The use of solid-core (AWG24), shielded, Cat 5e (or better) is recommended.

<b>Cat X Solid-Core Cable AWG24</b>	S/UTP (Cat 5e) cable according to EIA/TIA-568-B. Four pairs of wires AWG24. Connection according to EIA/TIA-568-B (1000BASE-T).
<b>Cat X Patch Cable AWG26/8</b>	S/UTP (Cat 5e) cable according to EIA/TIA-568-B. Four pairs of wires AWG26/8. Connection according to EIA/TIA-568-B (1000BASE-T).



The use of flexible cables (patch cables) type AWG26/8 is possible, however the maximum possible extension distance is halved.

#### Maximum Acceptable Cable Length

<b>Cat X Installation Cable AWG24</b>	140 m (400 ft)
<b>Cat X Patch Cable AWG26/8</b>	70 m (200 ft)

## 7.2.2 Fiber



A point-to-point connection is necessary. Operation with multiple patch panels is allowed. Routing over active network components, such as Ethernet Hubs, Switches or Routers, is not allowed.

### Type of Interconnect Cable

(Cable notations according to VDE)

Type of cable	Specifications
Single-mode 9µm	<ul style="list-style-type: none"> <li>Two fibers 9µm</li> <li>I-V(ZN)H 2E9 (in-house patch cable)</li> <li>I-V(ZN)HH 2E9 (in-house breakout cable)</li> <li>I/AD(ZN)H 4E9 (in-house or outdoor breakout cable, resistant)</li> <li>A/DQ(ZN)B2Y 4G9 (outdoor cable, with protection against rodents)</li> </ul>
Multi-mode 50µm	<ul style="list-style-type: none"> <li>Two fibers 50µm</li> <li>I-V(ZN)H 2G50 (in-house patch cable)</li> <li>I/AD(ZN)H 4G50 (in-house or outdoor breakout cable, resistant)</li> </ul>
Multi-mode 62.5µm	<ul style="list-style-type: none"> <li>Two fibers 62.5µm</li> <li>I-V(ZN)HH 2G62.5 (in-house breakout cable)</li> <li>A/DQ(ZN)B2Y 4G62.5 (outdoor cable, with protection against rodents)</li> </ul>

### Maximum Acceptable Cable Length

Type of cable	Maximum Acceptable Cable Length
Single-mode 9µm	10,000 m (32,800 ft)
Single-mode 9µm XV	5,000 m (16,400 ft)
Multi-mode 50µm (OM3)	1,000 m (3,280 ft)
Multi-mode 50µm	400 m (1,300 ft)
Multi-mode 62.5µm	200 m (650 ft)




If you use single-mode SFPs with multi-mode fibers, you normally can double the maximum acceptable cable length.

### Type of Connector


Connector	LC Connector
-----------	--------------

## 7.3 Connector Pinouts


### Connector Mini USB Type B

Picture	Pin	Signal	Color
	1	VCC (+5VDC)	Red
	2	Data –	White
	3	Data +	Green
	4	n.c.	–
	5	GND	Black

### RJ45

Picture	Pin	Signal	Pin	Signal
	1	D1+	5	D3–
	2	D1–	6	D2–
	3	D2+	7	D4+
	4	D3+	8	D4–

### Fiber SFP Typ LC

Picture	Diode	Signal
	1	Data OUT
	2	Data IN

## 7.4 Power Supply

### AC Power Supply

Model	Max. Current	Max. Voltage	Frequency
474-BODY2N	700 mA max.	100-240 V	50/60 Hz
474-BODY6R	1,400 mA max.	100-240 V	47-63 Hz
474-BODY6BP	800 mA max.	100-240 V	50/60 Hz
474-BODY6BPF	800 mA max.	100-240 V	50/60 Hz
474-BODY21/4U	4,000 mA max.	2x 100-240 V	50/60 Hz

### DC Power Supply

Model	Max. Current	Max. Voltage
474-BODY2/2R	3,000 mA	5 VDC
474-BODY2N	5,000 mA	5 VDC
474-BODY4/4R	5,000 mA	5 VDC
474-BODY6R	8,000 mA	5 VDC

### Power Requirement

<b>Power Requirement (per Unit)</b>	(Cross) Repeater: <ul style="list-style-type: none"> <li>• Max. 300 mA</li> </ul>
-------------------------------------	---

## 7.5 Environmental Conditions

<b>Operating Temperature</b>	41 to 113°F (5 to 45°C)
<b>Storage Temperature</b>	-13 to 140°F (-25 to 60°C)
<b>Relative Humidity</b>	Max. 80% non-condensing

## 7.6 Size

### Devices in the 2-fold Vario Chassis 1

<b>CPU Unit / CON Unit</b>	145 x 147 x 41 mm (5.7" x 5.8" x 1.7")
<b>Shipping Box</b>	210 x 140 x 165 mm (8.3" x 5.5" x 6.5")

### Devices in the 2-fold Vario Chassis 2

<b>CPU Unit / CON Unit</b>	221 x 147 x 41 mm (8.7" x 5.8" x 1.7")
<b>Shipping Box</b>	550 x 365 x 115 mm (21.7" x 14.4" x 4.5")

### Devices in the 4-fold Vario Chassis

<b>CPU Unit / CON Unit</b>	293 x 147 x 41 mm (11.5" x 5.8" x 1.7")
<b>Shipping Box</b>	550 x 365 x 115 mm (21.7" x 14.4" x 4.5")

### Devices in the 6-fold Vario Chassis 6R

<b>CPU Unit / CON Unit</b>	442 x 147 x 41 mm (17.4" x 5.8" x 1.7")
<b>Shipping Box</b>	760 x 365 x 115 mm (29.9" x 14.4" x 4.5")

### Devices in the 6-fold Vario Chassis 6BP / 6BPF

<b>CPU Unit / CON Unit</b>	442 x 250 x 41 mm (17.4" x 9.8" x 1.7")
<b>Shipping Box</b>	550 x 372 x 155 mm (21.7" x 14.6" x 6.1")

### Devices in the 21-fold Vario Chassis

<b>CPU Unit / CON Unit</b>	482 x 462 x 176 mm (19.0" x 18.2" x 6.9")
<b>Shipping Box</b>	645 x 574 x 368 mm (25.4" x 22.6" x 14.5")

## 7.7 Shipping Weight

### Devices in the 2-fold Vario Chassis 1

<b>CPU Unit / CON Unit</b>	0.4 kg (0.9 lb)
<b>Shipping Box</b>	2.2 kg (4.9 lb)

### Devices in the 2-fold Vario Chassis 2

<b>CPU Unit / CON Unit</b>	0.8 kg (1.8 lb)
<b>Shipping Box</b>	2.6 kg (5.7 lb)

### Devices in the 4-fold Vario Chassis

<b>CPU Unit / CON Unit</b>	0.9 kg (2.0 lb)
<b>Shipping Box</b>	3.4 kg (7.5 lb)

### Devices in the 6-fold Vario Chassis 6R

<b>CPU Unit / CON Unit</b>	1.4 kg (3.1 lb)
<b>Shipping Box</b>	4.6 kg (10.1 lb)

### Devices in the 6-fold Vario Chassis 6BP / 6BPF

<b>CPU Unit / CON Unit</b>	2.5 kg (5.5 lb)
<b>Shipping Box</b>	3.5 kg (7.7 lb)

### Devices in the 21-fold Vario Chassis


<b>CPU Unit / CON Unit</b>	10.0 kg (22.1 lb)
<b>Shipping Box</b>	14.5 kg (32.0 lb)



# 8 Troubleshooting

## 8.1 General Failures

Module

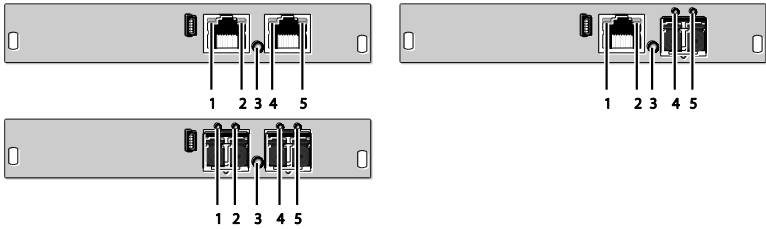

Rear View

Diagnosis	Possible Reason	Measure
LED 3 off	Power supply	➔ Check power supply units and the connection to the power network.
LED 2 off or LED 5 off	Connection between (Cross) Repeater and KVM extender unit or KVM matrix	➔ Check interconnect cables and connections.

# 9 Technical Support

Prior to contacting support please ensure you have read this manual, and then installed and set-up your (Cross) Repeater as recommended.

## 9.1 Support Checklist

To efficiently handle your request it is necessary that you complete a support request checklist ([Download](#)). Please ensure that you have the following information available before you call:

- Company, name, phone number and email
- Type and serial number of the device (see bottom of device)
- Date and number of sales receipt, name of dealer if necessary
- Issue date of the existing manual
- Nature, circumstances and duration of the problem
- Components included in the system (such as graphic source/CPU, OS, graphic card, monitor, USB-HID/USB 2.0 devices, interconnect cable) including manufacturer and model number
- Results from any testing you have done

## 9.2 Shipping Checklist

1. To return your device, contact your dealer to obtain a RMA number (Return-Material-Authorization).
2. Package your devices carefully, preferably using the original box. Add all pieces which you received originally.
3. Note your RMA number visibly on your shipment.



Devices that are sent in without a RMA number cannot be accepted. The shipment will be sent back without being opened, postage unpaid.

## 10 Certificates

### 10.1 CE Declaration Of Conformity

The products listed below in the form as delivered comply with the provisions of the following European Directives:

- 2014/30/EU Council Directive on the approximation of the laws of the Member States relating to electromagnetic compatibility
- 2014/35/EU Council Directive on the harmonization of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits



CE Marking

Product list:

485 Series

The products comply with the following harmonized standards for Information Technology Equipment:

- EN 55022: 2010/AC:2011 (Class A)
- EN 55024:2010 + A1:2015
- EN 61000-3-2:2014
- EN 61000-3-3:2013
- EN 61000-6-2:2005
- EN 60950-1:2006/A2:2013

Manufacturer:  
IHSE GmbH  
Maybachstrasse 11  
88094 Oberteuringen  
Deutschland

Oberteuringen, October 1st, 2016  
The Management



### Use in a Domestic Environment

This is a Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

This declaration certifies the conformity to the specified directives but contains no assurance of properties. The safety instructions and installation guidelines noted in this manual shall be considered in detail. Compliance with the specifications for cable lengths and types is mandatory.

## 10.2 North American Regulatory Compliance

This equipment has been found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Shielded cables must be used with this equipment to maintain compliance with radio frequency energy emission regulations and ensure a suitably high level of immunity to electromagnetic disturbances.

All power supplies are certified to the relevant major international safety standards.

## 10.3 Product Safety

The product safety of the devices is proven by the compliance to the following standards:

- IEC 60950-1A1:2010
- EN 60950-1/A12:2011/A1:2010/A11:2009
- UL 60950-1-2007
- CAN/CSA-C22.2 60950-1-07

The compliance is verified and confirmed by TÜV Süd, Germany.



## 10.4 WEEE

The manufacturer complies with the EU Directive 2012/19/EU on the prevention of waste electrical and electronic equipment (WEEE).

The device labels carry a respective marking.

## 10.5 RoHS/RoHS 2

This device complies with the Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS 2, RoHS II).

The device labels carry a respective marking.

## 11 Glossary

The following terms are commonly used in this guide or in video and KVM technology:

Term	Explanation
AES/EBU	Digital audio standard that is officially known as AES3 and that is used for carrying digital audio signals between devices.
Cat X	Any Cat 5e (Cat 6, Cat 7) cable
CGA	Color Graphics Adapter (CGA) is an old analog graphic standard with up to 16 displayable colors and a maximum resolution of 640x400 pixels.
Component Video	Component Video (YPbPr) is a high-quality video standard that consists of three independently and separately transmittable video signals, the luminance signal and two color difference signals.
Composite Video	Composite Video is also called CVBS and it is part of the PAL TV standard.
CON Unit	Component of a KVM Extender or Media Extender to connect to the console (monitor(s), keyboard and mouse; optionally also with USB 2.0 devices)
Console	Keyboard, mouse and monitor
CPU Unit	Component of a KVM Extender or Media Extender to connect to a source (computer, CPU)
CVBS	The analog color video baseband signal (CVBS) is also called Composite Video and it is part of the PAL TV standard.
DDC	Display Data Channel (DDC) is a serial communication interface between monitor and source (computer, CPU). It allows a data exchange via monitor cable and an automatic installation and configuration of a monitor driver by the operating system.
DisplayPort	A VESA standardised interface for an all-digital transmission of audio and video data. It is differentiated between the DisplayPort standards 1.1 and 1.2. The signals have LVDS level.
Dual Access	A system to operate a source (computer, CPU) from two consoles

Term	Explanation
Dual Link	A DVI-D interface for resolutions up to 2560x2048 by signal transmission of up to 330 MPixel/s (24-bit)
Dual-Head	A system with two video connections
DVI	Digital video standard, introduced by the Digital Display Working Group ( <a href="http://www.ddwg.org">http://www.ddwg.org</a> ). Single Link and Dual Link standard are distinguished. The signals have TMDS level.
DVI-I	A combined signal (digital and analog) that allows running a VGA monitor at a DVI-I port – in contrast to DVI-D (see DVI).
EGA	The Enhanced Graphics Adapter (EGA) is an old analog graphic standard, introduced by IBM in 1984. A D-Sub 9 connector is used for connection.
Fiber	Single-mode or multi-mode fiber cables
HDMI	An interface for an all-digital transmission of audio and video data. It is differentiated between the HDMI standards 1.0 to 1.4a. The signals have TMDS level.
KVM	Keyboard, video and mouse
Mini-XLR	Industrial standard for electrical plug connections (3 pole) for the transmission of digital audio and control signals
Multi-mode	62.5 $\mu$ multi-mode fiber cable or 50 $\mu$ multi-mode fiber cable
OSD	The On-Screen-Display is used to display information or to operate a device.
Quad-Head	A system with four video connections
RCA (Cinch)	A non-standard plug connection for transmission of electrical audio and video signals, especially with coaxial cables
S/PDIF	A digital audio interconnect that is used in consumer audio equipment over relatively short distances.
SFP	SFPs (Small Form Factor Pluggable) are pluggable interface modules for Gigabit connections. SFP modules are available for Cat X and fiber interconnect cables.

## Draco vario (Cross) Repeater

Term	Explanation
Single Link	A DVI-D interface for resolutions up to 1920x1200 by signal transmission of up to 165 MPixel/s (24-bit). Alternative frequencies are Full HD (1080p), 2K HD (2048x1080) and 2048x1152.
Single-Head	A system with one video connection
Single-mode	9 $\mu$ single-mode fiber cable
S-Video (Y/C)	S-Video (Y/C) is a video format transmitting luminance and chrominance signals separately. Thereby it has a higher quality standard than CVBS.
TOSLINK	Standardized fiber connection system for digital transmission of audio signals (F05 plug connection)
Triple-Head	A system with three video connections
USB-HID	USB-HID devices (Human Interface Device) allow for data input. There is no need for a special driver during installation; "New USB-HID device found" is reported. Typical HID devices include keyboards, mice, graphics tablets and touch screens. Storage, video and audio devices are <b>not</b> HID.
VGA	Video Graphics Array (VGA) is a computer graphics standard with a typical resolution of 640x480 pixels and up to 262,144 colors. It can be seen as a follower of the graphics standards MDA, CGA and EGA.